

▶ cast film lines

SML
EXTRUSION LINES – ENGINEERED TO PERFORM ▶

▶ STRETCH WRAP FILM

PowerCast XL



**Extrusion lines –
engineered to perform**

Film production at unparalleled levels

SML's PowerCast XL is an ultra-high-performance stretch film extrusion line that combines quantity with top quality.

The PowerCast XL stands out due to its production in a 4 m-width and its flexibility to handle 2-inch and 3-inch hand, machine and jumbo rolls at high production speeds.


This facilitates throughputs ranging from 2,400 kg/h to 4,200 kg/h.

Key Features

- Narrow design, low space requirements
- Low power consumption thanks to energy saving extrusion technology
- Lowest labor cost per kg film
- High output even with a thin gauge
- Superior film quality due to optimised chill roll design
- Excellent production stability at high speeds

PowerCast

- ▶ 4 meter wide (8-up) standard stretch film line
- ▶ 4.5 meter wide (9-up) XL stretch film line
- ▶ Choice between 7 to 67 layers

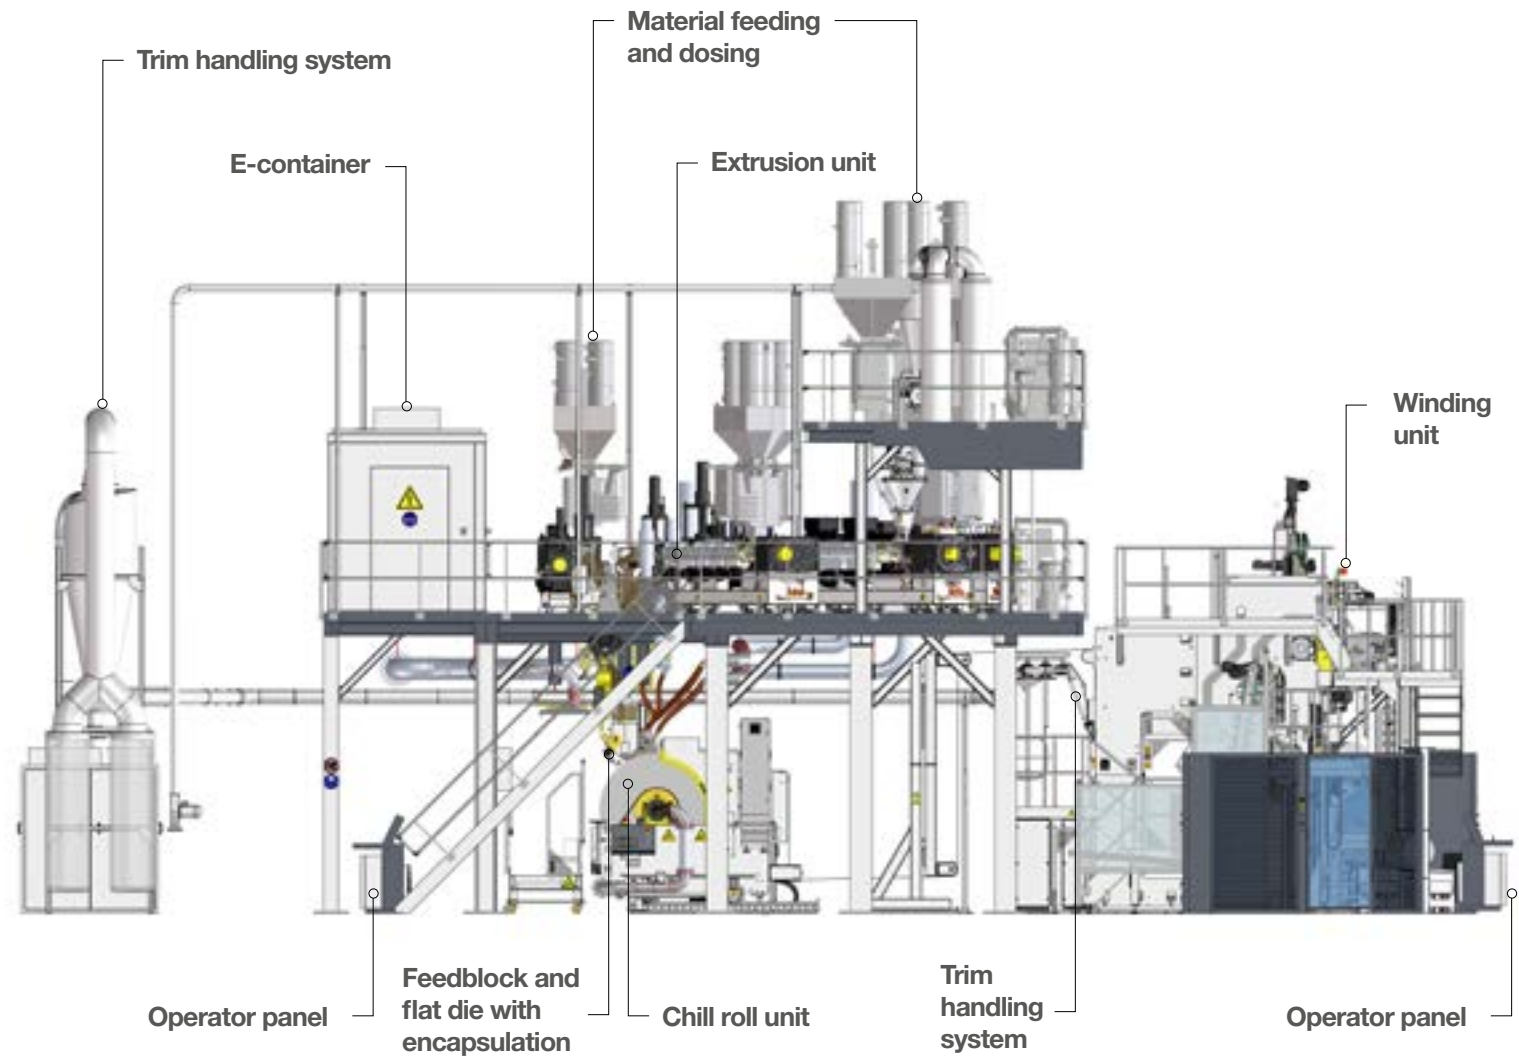

PRODUCT SPECIFICATIONS

Products	super power stretch, automatic stretch, hand stretch, cling film	
Film thickness range	8 - 50 µm	
Film final width double turret	8 x 500 mm, 9 x 450 mm, 10 x 400 mm	
Film final width triple turret	9 x 500 mm, 6 x 750 mm	
Film structure	7 - 67 layers	
Production speed	up to 800 m/min	
Net output value PowerCast	12 µm	> 2,000 kg/h
	23 µm	3,400 kg/h

EXTRUDER CONFIGURATIONS

<i>PowerCast[®]S</i>	<i>PowerCast[®]L</i>	<i>PowerCast[®]XL</i>
Gravimetric batch dosing system with 2 components. Option: 3 or 4 components		
7 extruders	7 extruders	7 extruders
2 x 90/33 each 600 kg/h	2 x 90/33 each 950 kg/h	2 x 90/33 each 950 kg/h
5 x 60/28 each 240 kg/h	5 x 75/33 each 380 kg/h	4 x 75/33 each 450 kg/h
		1 x 90/33 600 kg/h
SML advanced heaters for extruder barrels		
Edge encapsulation extruder 45/28D		
7-layer feedblock (optional 9, 11, 13, 55, 67 layers)		
Automatic flat die: 4,800 mm		5,450 mm

WINDING UNIT
Winder W4000-4S 3T



CHILL ROLL UNIT

- ▶ Primary chill roll Ø 1,600 mm, width 5,500 mm
- ▶ Optional chill roll Ø 400 mm, width 5,500 mm
- ▶ Automatic positioning
- ▶ IR thickness measurement
- ▶ Alternative: X-ray or Beta sensor
- ▶ Oscillating frame
- ▶ Cut-resistant guiding rolls

WINDER W4000-4S

- ▶ 2 turrets for total 8 x 500 mm / 9 x 450 mm / 10 x 400 mm
- ▶ triple turret for total 9 x 500 mm, 6 x 750 mm
- ▶ Hand, machine and jumbo rolls (up to 60 kg) on 2-inch and 3-inch cores
- ▶ Ultimate short film tail for a perfect roll finish
- ▶ Alternative: Winder W4000-2S

EDGE TRIM REFEEDING SYSTEM

- ▶ Recycling unit with reel feeder for pelletising of edge trims and start-up rolls.
Alternative: Vertical scraptruder (fluff refeeding system).

Various roll widths: 400/450/500/750 mm
Ultra short film tail



Products:

Super power stretch
Automatic stretch
Hand stretch
Cling film

▶ **Take advantage
of our global
leadership in
extrusion
technology.**

**ANALYSES
DEVELOPMENT
PRE-TESTED PERFORMANCE
DELIVERY ON TIME
SERVICE SUPPORT
CUSTOMER SATISFACTION**

SML
EXTRUSION LINES – ENGINEERED TO PERFORM ▶

SML - Head Office

Gewerbepark Ost 32
4846 Redlham
Austria
Phone: +43 7673 90999
E-mail: sml@sml.at
www.sml.at

SML - Machinery Far East Sdn Bhd

(1029958-P)
1201 Block B, Menara Amcorp
No.18 Jalan Persiaran Barat
46050 Petaling Jaya
Selangor Darul Ehsan,
Selangor, Malaysia
Phone: +60 3 7955 9098
E-mail: yen@sml.at

SML - Beijing Office

Unit 1410, Landmark Tower
No. 8 North Dongsanhuan Road
Chaoyang District
100004 Beijing, P.R. of China
Phone: +86 10 6590 0946
E-mail: sml@sml.bj.cn

SML - North America Service, Inc.

Suite 204
85 Eastern Avenue
Gloucester MA 01930
USA
Phone: +1 978 281 0560
Mobile: +1 978 394 1553
E-mail: jom@sml.at



www.sml.at